
UNTHA The reliable brand! UNTHA shredding technology LRLSO Shredding solution for economic processing of waste wood

The tried-and-tested UNTHA cutting system



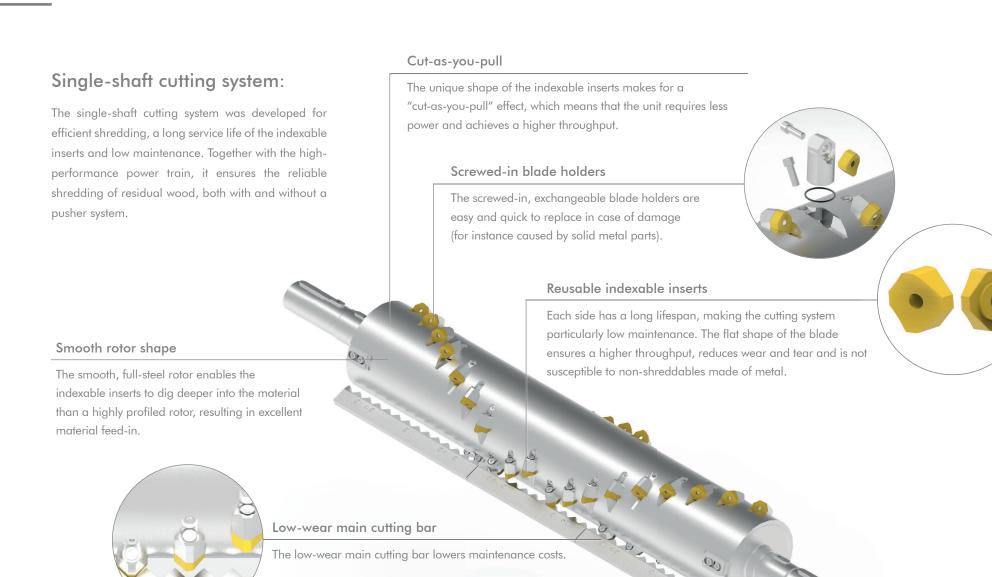

The LR630 is an absolute classic among single-shaft shredders, offering a robust design and excellent value for money. It is mostly used by carpentry and joinery workshops that have small to medium-sized volumes of residual wood.

The high-performance drive concept, a powerful horizontal pusher and the tried-and-tested UNTHA cutting system make for a highly reliable shredding process. The homogeneous final product is extremely well suited for use in a wood-chip heating system or for manufacturing wood briquettes.

A low rated capacity and automatic shut-off in case of idling considerably reduce energy costs.

Areas of application

- » Hard and soft wood
- » OSB
- » Chipboard panels
- » MDF panels
- » Veneers
- » etc.



Your benefits at a glance



Reliable, cost-effective cutting system

The large rotor diameter (248 mm) and screen surface ensure a high throughput.

The screw-in, exchangeable blade holders are easy and quick to replace in case of damage (for instance caused by solid metal parts). The precise cutting gap between the cutting bar and the indexable inserts makes the shredding process particularly efficient.

Unique geometry of the indexable inserts

The reusable indexable inserts have a long service life. Their unique cutting geometry ensures a "cut-as-you-pull" effect that makes for particularly effective shredding even of wet wood.


The positive connection between the indexable insert and the blade holders prevents the fastening bolt from becoming deformed. It is easy to loosen and remove even after many hours of operation.



Low-wear perforated screen

Depending on the requirements, a range of screens ensure the production of pre-defined wood chips. The shredded material is then removed via a suction mechanism or a screw conveyor.

The special design of the perforated screen provides a particularly homogeneous final product without excess lengths that is ideal for briquetting or use in a wood-chip heating system.

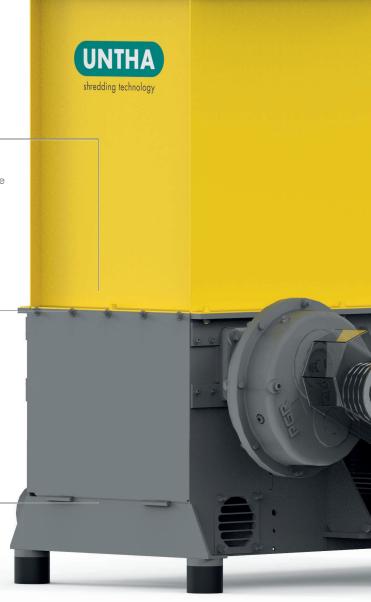

Unique warranty

As a proof of our excellent product quality, we are happy to offer you a 3-year warranty*. Many renowned companies already put their trust in our quality standards.

*3 years or 2000 hours, depending on which value is reached first.



Powerful pusher system

The powerful horizontal pusher pushes the residual wood against the rotor (load-dependent), ensuring a constant material feed. The hydraulic power unit is safely integrated in the machine frame and yet easily accessible.

Energy-efficient, failure-free drive concept

The tried-and-tested belt drive and elastomer damper absorb shocks and vibrations and ensure the smooth running of the machine. The automatic reverse function, detection of non-shreddables and shut-off function protect the drive unit. The automatic shut-off function shuts down the machine when idling, further lowering energy costs.



Options

Mechanical extras

» Screw conveyor

Electrical extras

- » Control system upgrade (light barrier)
- » Integration of peripheral devices into the control system
- » Suction mechanism activation
- » Automatic start


Accessories

- » Customer-specific undercarriages
- » Range of discharge feed systems (conveyor belts, ...)
- » Range of metal separation units

Service

» UNTHA Carefree Packages (Basic, Standard, Professional): Ensure that machines are technically sound and ready for use at all times



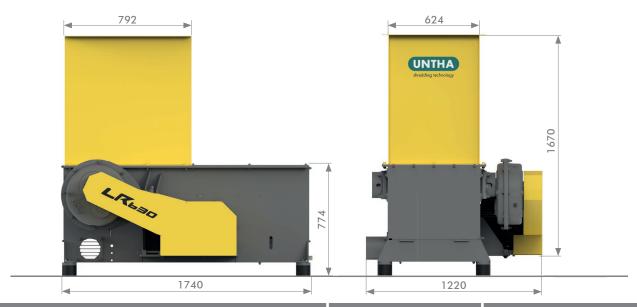

| TECHNICAL DATA | | LR630 |
|--|--------|---------------|
| Rated capacity of the rotor | kW | 11/15/18.5 |
| Rated capacity of the hydraulic system | kW | 0.75 |
| Ø Rotor | mm | 248 |
| Rotor speed | rpm | 85 - 98 |
| Number of indexable inserts | pcs. | 17 |
| Feed opening | mm | 624 x 792 |
| Ø Suction nozzles | mm | 160 |
| Required suction speed | m/s | 28 |
| Weight | kg | арргох. 1,300 |
| Workspace-specific sound pressure level LPA 1m | dB (A) | 82 |
| Ø perforated screen | mm | 15 - 30 |
| Throughput rates* | srm/h | Up to 2 |
| | | |

^{*)} Dependent on type of material and diameter of perforated screen All dimensions in mm

UNTHA shredding technology GmbH

Kellau 141

5431 Kuchl | Österreich Tel.: +43 6244 7016 0 Fax: +43 6244 7016 1 info@untha.com

Authorised UNTHA sales partner



5 reasons to choose UNTHA



Customised, long-lasting shredding solutions



Premium quality products and services



All-encompassing expertise, from development to production, under one roof



Reliable customer service with the best technical know-how



More than 10,000 satisfied reference customers worldwide

We deliver what we promise

Since our founding in 1970, we've followed our promise of being "the reliable brand", which applies to every product and service that UNTHA delivers.

We work hard to consistently outperform our competitors, and provide customers with the confidence that – in choosing UNTHA – they have made the best decision for their business.

All revisions reserved. Subject to setting and printing errors.

All illustrations are representative and may deviate from the actual product.

© 12/20 UNTHA shredding technology